


8 GE + 2GE with built-in Power Supply POE SWITCH

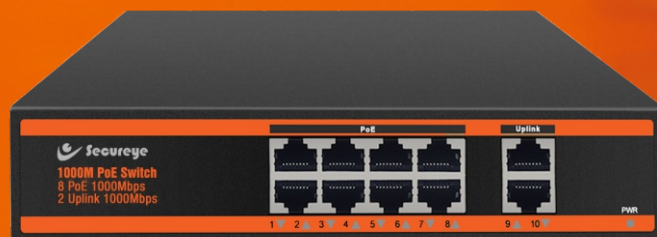

Features

- 8*10/100/1000Mbps PoE ports, 2*10/100/1000Mbps uplink port
- Support IEEE802.3af/at
- Support restrain network storm, VLAN function
- All port supported by MDI/MDIX auto flip and self-negotiation
- Built-in power supply
- Maximum power of single PoE port: 30 W
- Maximum PoE power: 150W
- Adopts store-and-forward architecture
- Fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall
- Support lightning protection 4000V

SPECIFICATION

S-8GE-2UG-NB

Power Adapter Voltage	AC 110V-240V
Consumption	150W
PoE Ethernet Port	1 ~ 8 Port : 10/100/1000Mbps
Ethernet port	Uplink Port : 10/100/1000Mbps
Transmission Distance	1 ~ 8 Port : 10/100/1000M: 0 ~ 100m Uplink Port : 0 ~ 100m
Transmission Medium	Cat5/5e/6 standard network cable
Network Standard	IEEE802.3/802.3u, IEEE802.3x, IEEE802.ab
Switching Capacity	20Gbps
Packet Buffer Memory	1Mbits
Throughput	14.88Mbit
MAC Table	2K
Forcing Model	Store -and -forward
Data Package length	1518byte
Full Wire Speed	Full wire speed transmission under full duplex mode
Packet Forwarding Rate	10Mbps:14880pps/port, 100Mbps:148800pps/port 1000Mbps:1488000pps/port
PoE Standard	IEEE 802.3af/at
PoE Power Supply	1/2(+), 4/5(+), 3/6(-), 7/8(-)
PoE Power	af=15.4W at=30W
LED Indicator	Power indicator: keep bright when connect power Network indicator: Flicker when there is data transmission
Working temperature	0° ~ 55°C
Relative Humidity	20~95%
Storage temperature	-20° ~ 70°C
MTBF	>30000h

