

## 4MP IP Bullet Camera

50M IR, White Light, PoE,  
Audio, 4mm



**SP-C4QN-I5W**  
Color Master Series

### KEY FEATURES

- Metal+Plastic Housing
- Up to 2688X1520@25fps
- S+265/H.265/H.264
- Min. Illumination Color: 0.02Lux@F1.6
- 2 Warm Lights, 15m
- Built-In Mic
- Smart IR, IR Range: 50m
- Operating Conditions -30°C ~ 60°C, 0 ~ 95% RH
- POE, IP67




Camera	
Image Sensor	1/2.9"CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON), B/W:0Lux with IR
Shutter Time	1s-1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	120dB
S/N	>40dB
Angle Adjustment	0-360°; 0-80°; 0-360°
Lens	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	83.2°(H); 43°(V); 93.7°(D)
DORI Distance	Detect:80.0m Observe:31.7m Recognize:16.0m Identify:8.0m
Illuminator	
IR LEDs	2
IR Distance	50m
Wavelength	850nm
White LEDs	2
Whitelight Distance	15m
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k-6Mbps
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz

Image	
<b>Max. Resolution</b>	2688x1520@25fps
<b>Main Stream</b>	PAL: 25fps(2688x1520, 2460x1440, 2304x1296, 1920x1080, 1280x720) NTSC: 24fps(2688x1520, 2560x1440) NTSC: 30fps(2304x1296, 1920x1080, 1280x720)
<b>Sub Stream</b>	PAL: 25fps(704x576, 704x288, 352x288, 640x360) NTSC: 30fps(704x480, 704x240, 352x240, 640x360)
<b>BLC</b>	Yes
<b>HLC</b>	Yes
<b>AGC</b>	Yes
<b>3D DNR</b>	Yes
<b>White Balance</b>	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance
<b>ROI</b>	8 regions
<b>OSD</b>	1regions;16*16/32*32/48*48/64*64
<b>Privacy Mask</b>	4 regions
<b>Defog</b>	Yes
Feature	
<b>Alarm Trigger</b>	Motion Detection; Mask Alarm; IP Address Conflict
<b>Linkage Method</b>	Trigger Warmlight; Trigger Capture
<b>Video Analytics</b>	Tripwire; Perimeter
<b>Rules of behavior analyse in 1 scene</b>	2

Network	
Protocols	HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;DHCP;DNS;DDNS;Easy DDNS;NTP;QoS;IPv4;SSH;Unicast;RTSP;FTP
System Compatibility	P2P(Mutually exclusive with Profile G); Onvif Profile S/T; CGI; MIL STONE
Remote Connection	<2
PC CMS Software	Secureye Smart Client
Mobile APP	Phoenix Pro
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Interface	
Communication Interface	1RJ45 10M/ 100M self adaptive Ethernet port
Built-In Mic	Yes
General	
Web Client Language	English/Spanish/Italian/Turkish French/Polish/German/Ukrainian
Operating Temperature	-30°C-60°C
Operating Humidity	0-95%
Storage Temperature	-30°C-60°C
Storage Humidity	0-95%(non-condensing)
Power Supply	DC12V+25%, MAX 6.5W; POE 802.3af, MAX 7W
Protection	Surge Protection 2000V; Lightning Proof 6000V
Boundary Dimensions	164(L)73(W)73(H)mm
Package Dimensiond	180(L)90(W)95(H)mm
GrossWeight	0.35Kg
NetWeight	0.25Kg

**DIMENSIONS (Unit: mm)**

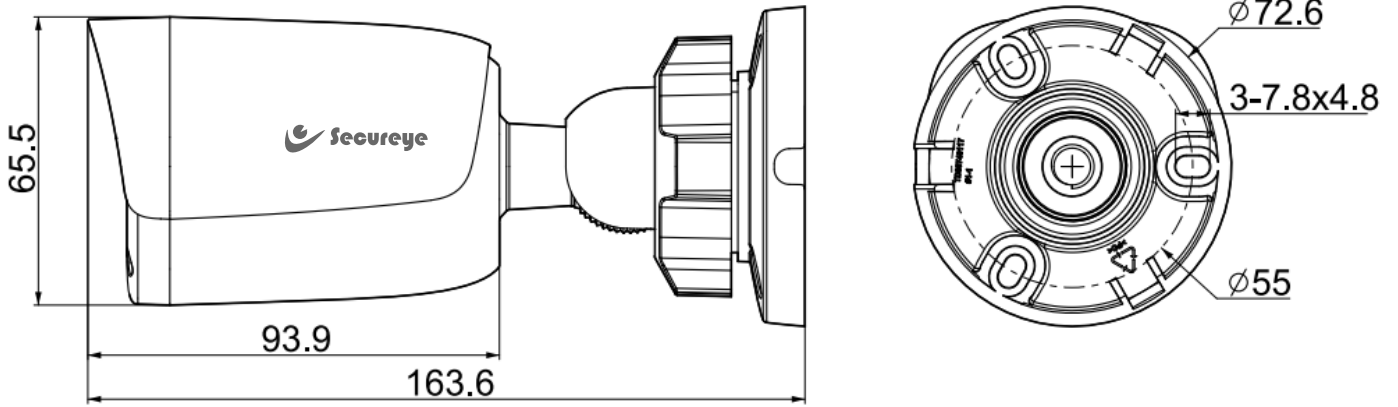

**ACCESSORIES**

