

## DS-7108HGH-K1/R 8-ch Mini Size Real-Time TURBO HD DVR

### Key Features

- Full channel encoding at up to 1080p Lite@30 fps
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTV/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 10-ch IP camera inputs
- Max. 1200 m for 720p HDTV signal



### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Recording at up to 1080p Lite@30fps resolution. When 1080p Lite mode is enabled, the image effect is similar with 1080p

### Storage and Playback

- 1 SATA interface (up to 6 TB capacity per HDD)
- Smart search for efficient playback

### Smart Function

- VQD (Video Quality Diagnostics)

### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 72 Mbps total bandwidth




## Specifications

<b>Model</b>	<b>DS-7108HGHI-K1/R</b>
<b>Recording</b>	
<b>Video compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
<b>Encoding resolution</b>	When 1080p Lite mode is not enabled: 720p/WD1/4CIF/VGA/CIF When 1080p Lite mode is enabled: 1080p Lite/720p/WD1/4CIF/VGA/CIF
<b>Frame rate</b>	Main stream: When 1080p Lite mode is not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) When 1080p Lite mode is enabled: 1080p Lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Sub-stream: 4CIF/2CIF@6fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)
<b>Video bit rate</b>	32 Kbps to 4 Mbps
<b>Dual stream</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711u
<b>Audio bit rate</b>	64 Kbps
<b>Video and Audio</b>	
<b>IP video input</b>	2-ch (up to 10-ch)
	Up to 1080p resolution
	Support H.265+/H.265/H.264+/H.264 IP cameras
<b>Analog video input</b>	8-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
<b>Turbo HD input</b>	1080p25, 1080p30, 720p25, 720p30
<b>AHD input</b>	1080p25, 1080p30, 720p25, 720p30
<b>HDCVI input</b>	1080p25, 1080p30, 720p25, 720p30
<b>CVBS input</b>	Support
<b>HDMI output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>Video output mode</b>	HDMI/VGA simultaneous output
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
	8-ch via coaxial cable
<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)
<b>Two-way audio</b>	Reuse the first audio input
<b>Synchronous playback</b>	8-ch
<b>Network</b>	
<b>Remote connection</b>	64
<b>Network protocol</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface
<b>Total bandwidth</b>	72 Mbps total bandwidth
<b>Auxiliary interface</b>	
<b>SATA</b>	1 SATA interface
<b>Capacity</b>	Up to 6 TB capacity for each disk

<b>Alarm in/out</b>	N/A
<b>USB interface</b>	Rear panel: 2 × USB 2.0
<b>General</b>	
<b>Power supply</b>	12 VDC, 1.5 A
<b>Consumption (without HDD)</b>	≤ 12 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Dimensions (W × D × H)</b>	200 × 200 × 45 mm (7.9 × 7.9 × 1.8 inch)
<b>Weight (without HDD)</b>	≤ 0.8 kg (1.8 lb)
<b>Certification</b>	
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 55024

## Physical Interface

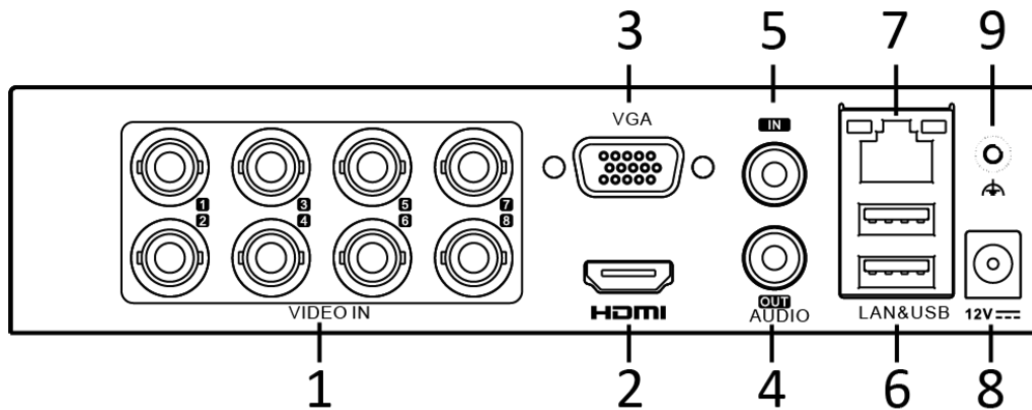

No.	Description	No.	Description
1	Video and Coaxial Audio In	6	USB Interface
2	HDMI Interface	7	LAN Network Interface
3	VGA Interface	8	12 VDC Power Input
4	AUDIO OUT, RCA Connector	9	GND
5	AUDIO IN, RCA Connector		

## Available Model

DS-7108HGHI-K1/R

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 [10] 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

04301202000706