


DIGISOL 4 Port PoE Gigabit Ethernet Unmanaged Switch with 2 1G Uplink Ports

DG-GS1006PFS-B



Key Features:-

- 4 PoE Gigabit ports + 1 10/100/1000 Base-T uplink + 1 Gigabit SFP uplink port
- Support PoE power up to 15.4W (IEEE802.3af)/ 30W (IEEE802.3at) for PoE ports
- All ports support MDI/MDIX
- PoE: 78W
- Plug and play installation
- Forwarding Mode: Store-And-Forward
- Switching capacity: 12Gbps Full duplex
- Built-in AC Power Supply
- Support 6KV lightning protection
- Fanless for quiet functioning with natural cooling
- Small and compact design, suitable for desktop or wall-mounting
- Supports distance of 250m at 10 Mbps

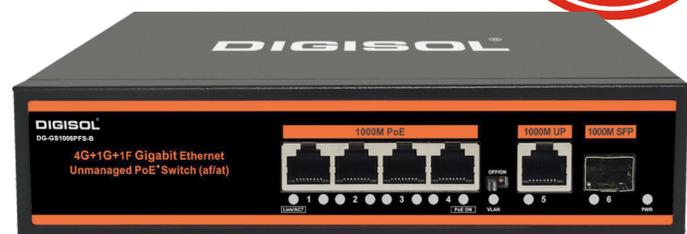

Introduction:-

DIGISOL DG-GS1006PFS-B Switch offers 4x10/100/1000Mbps Ethernet ports with Power over Ethernet support with 1*1000Mbps Base-T and 1*1000Mbps SFP uplink port. These PoE ports are IEEE 802.3af and IEEE802.3at compliant and can supply up to a Max. of 30 watt per port and a total PoE power of 78Watt. The existing Ethernet cables can be used to power up PoE compliant network devices. This eliminates the need of an external power source and power cabling for such devices. The switch provides flexibility to users for connecting a PoE or non PoE device. The PoE devices connected to switch can be easily identified by the separate PoE LED status indicators for each port.

Key Feature & Benefits:-

4 x 10/100/1000Mbps RJ-45 Nway ports

DG-GS1006PFS-B Switch offers 4x10/100/1000Mbps Gigabit Ethernet PoE ports with an additional 2x1000M Gigabit uplink ports (1GT + 1 SFP) to extend the existing network. This Switch also allows for auto-sensing and auto negotiation of highest available speed (10/100/1000Mbps) and duplex mode, providing an automatic and flexible solution for the network. The devices connected to switch can be easily identified by LED indicators.

Plug and Play installation

DG-GS1006PFS-B switch operates without any configuration. The built in auto-negotiation feature of the switch will adapt its speed (10/100/1000Mbps) as per the Remote host connected to its port. Each port supports Auto MDI/MDI-X operation for uplink ports which eliminates the need for cross over cables or dedicated uplink ports. This features gives true plug-n-play operation by reducing most common cabling errors during installations. Any port can simply plug to a server or a switch, using the usual straight-through twisted-pair cable.

High-Performance

With its backplane capacity of 12Gbps, data transfer is at an average of 2000 Mbps per port at full duplex mode.

DIGISOL

SWITCHING SOLUTIONS



Technical Specifications:-

Ports Configuration

- Network Ports: 6
- PoE Port: 4 x 1000Mbps. Max. 30W Output of Single PoE Port
- Power Indicators:
- Light on: Powering
- Light off: No Power
- VLAN Indicator
- Green light on: VLAN mode
- Light off: Normal mode
- Port 1-6 indicator
- Light off: Link is disconnected
- Red light on: Powering but data disconnected
- Light flash quickly: Data Transmitting

Standard

- Network Protocol: IEEE802.3/802.3u/ 802.3x/ 802.3ab/ 802.3az

Performance

- Switching Capacity: 12Gbps Full duplex
- Packet Forwarding Rate: 14.88Mpps/port
- Forwarding Mode: Store-and-forward
- MAC Address Table: 2K
- Supports Vlan Mode

Power Over Ethernet

- PoE Standard: IEEE802.3af, IEEE802.3at
- PoE Power Supply 1/2/4/5(+), 3/6/7/8(-)
- Transmission Distance: 0~250m/10Mbps, 0~100m/1000Mbps
- PoE Feature All ports support MDI/MDIX

General

- Power Source: Bult-in Power Supply
- Input: 110-240V AC, 50/60Hz
- PoE Power Budget: 78W
- Operating Temperature: -0°C-55°C
- Humidity: 20%-95% , non-condensing
- Storage Temperature: -20°C-70°C
- Weight: 1Kg

Ordering Information:-

DG-GS1006PFS-B: DIGISOL 6 Port Gigabit Ethernet Unmanaged Switch with 4 PoE Ports and 2 Gigabit uplink ports, PoE Budget: 78W

*Warranty shall be subject to terms and conditions specified in the DIGISOL PRODUCT WARRANTY displayed on the website of the company.

DIGISOL Logos are trademarks and/or registered trademarks of DIGISOL SYSTEMS LIMITED. Other trademarks, product, service and company names mentioned are the property of their respective owners. Information is subject to change without notice. The actual product appearance may differ from the one shown here. © 2024 DIGISOL SYSTEMS LIMITED. All rights reserved.

DIGISOL is a Subsidiary of Smartlink Holdings Limited

DIGISOL SYSTEMS LIMITED
CITIPOINT, 7th Floor,
Unit No. B-701, B-702 & B-703,
Andheri-Kurla Road, J. B. Nagar,
Andheri (East),
Mumbai - 400059, INDIA



1800-209-3444



www.digisol.com



helpdesk@digisol.com

f@DIGISOLINDIA